

ViewSonic® VIEWBOARD **ViewBoard IFP7552-2F**


Key Features

- Seamless plug-and-play connectivity with triple USB-C ports
- Intuitive Android™ 13 customizable launcher with draggable apps and widgets
- Advanced security controls and compliance standards that safeguard your data
- Enhanced collaboration with integrated myViewBoard software powered by Octa-core CPU
- *Google, Android, YouTube, Google Maps and other marks are trademarks of Google LLC.



Product Description

Tap into limitless learning with the ViewBoard IFP52-2F Series. Certified under the Android Enterprise Device License Agreement (EDLA), it seamlessly harmonises the Android™ 13 operating system with myViewBoard software and Google Play Store access to deliver enriched learning experiences enhanced by robust security features. Collaborate with split-screen multitasking; enjoy seamless connectivity and streamlined workflows empowered by triple USB-C ports and vCast wireless screen casting; and captivate remote and in-person students alike using its built-in microphones and front-facing speaker. Complete with a full range of compatible accessories, it invigorates learning experiences to take student engagement to new heights.

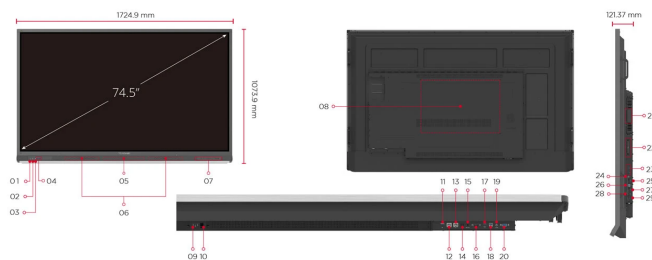

- | | | |
|--------------------------------|----------------|-----------------|
| 1. USB Type-C | 11. USB 2.0 | 21. Slot-in PC |
| 2. HDMI In | 12. LAN | 22. Wifi Slot |
| 3. Touch | 13. LAN | 23. USB 3.0 x 2 |
| 4. USB 3.0 x 2 | 14. SPDIF | 24. USB Type-C |
| 5. 8-Microphone Array | 15. Audio Out | 25. HDMI Out |
| 6. Speakers | 16. RS232 | 26. Touch 1 |
| 7. Menu Control | 17. USB Type-C | 27. HDMI 2 |
| 8. VESA® Wall Mount 600x400 mm | 18. Touch 2 | 28. HDMI 3 |
| 9. AC In | 19. Audio In | 29. DP |
| 10. Power On/Off | 20. VGA | |

Visit Us www.viewsonic.com

DISPLAY		USB		REGULATIONS	
Panel Size:	75"	Type A:	USB3.0 x 4 (Front x 2; Rear x 2) USB 2.0x1 (Rear)	NRTL w/ CA,FCC-B w. DOE Energy Star,DOE EPEAT, CE EMC, LVD or CB, RoHS Green BOM, RoHS DoC, ErP, REACH SVHC List & DoC, EEL, WEEE	
Panel Type:	TFT LCD Module with DLED Backlight, IPS	Type B:	USB 3.0 x3(Front x1; Rear x 2)	PACKAGE CONTENTS	
Display Area (mm):	1650.24 (H) x 928.26 (V) (74.5" diagonal)	Type C:	x3 (Front x1 with USB3.0, DP1.2, Ethernet 100M, PD 65W; Rear x1 with USB3.0, DP1.2, Ethernet 100M, PD 100W; Rear x1 with USB3.0 data only)	1. 3m power cord by ship area	
Aspect Ratio:	16:9			2. Remote control with AAA battery (new VS remote control)	
Resolution:	UHD 3840x2160(Pixels)			3. 3m touch USB cable	
Colors:	1.07B colors			4. Touch pen x 2 (a set)	
Brightness:	450 nits	SPEAKERS		5. Quick Start Guide + Compliance statement	
Contrast Ratio:	4000:1 (typical) 12000:1 (max. with DCR enabled)	20x2+20W		6. RS232 adapter	
Response Time:	≤6ms	MICROPHONE		7. Clamp x 5	
Viewing Angles:	H = 178, V = 178 typ.	built-in 8-array microphone		8. Camera Plate	
Backlight Life:	50,000 hrs (typ).	TOP CAMERA PLATE		9. Screw x 8 (camera 2+2, wall mount 4)	
Surface Treatment:	Glass Anti-Glare + Anti-Fingerprint 7H Mohs (9H pencil)	Yes		10. HDMI cable 3m	
Orientation:	Landscape	EMBEDDED OS		11. AAA Battery x 2	
		Android 13		12. Compliance statement	
PLATFORM		BUNDLE SOFTWARE		COMPATIBLE SLOT-IN PC	
Processor:	Octa-Core CPU (A73*4 + A53*4)	Basic Annotation Software:	myViewBoard WhiteBoard for Android	VPC35-W53-G1, VPC37-W53-G1	
RAM:	8GB	Pro Annotation Software:	myViewBoard WhiteBoard for Windows (embedded in VPC)		
Storage:	64GB	Wireless Presentation:	myViewBoard Display, vCast		
TOUCH		SPECIAL FEATURES			
Type/ Tech:	UFT (Ultra Fine Touch) Technology	All-in-one USB port:	USB 3.0 "SmartPort USB" to all channels.		
Touch Resolution:	32767 x 32767	Simple LAN sharing between IFP and slot-in device:	10/100/1000M (USB Type-C 10/100, Android & PC 10/100/1000)		
Touch Point:	Windows: 40 points touch, Android: 20 points touch	Light Sensor:	Yes		
INPUT		POWER			
HDMI:	x3 (Frontx1:HDMI2.0 with CEC ; Rearx2:HDMI2.1 with CEC/ARC & HDMI 2.0 with CEC)	Voltage:	100-240VAC +/- 10% Wide Range		
RGB / VGA:	x1	Consumption:	124.06W (Energy Star) / Off: <0.5W		
DisplayPort:	x1	ERGONOMICS			
Audio:	x1 (PC audio in)	Wall Mount (VESA®):	600 x 400		
RS232:	x1	OPERATING CONDITIONS			
OPS:	module slot x 1	Temperature (° C):	0°C to 40°C		
OUTPUT		Humidity:	20% ~ 80% RH non-condensing		
HDMI:	x1	DIMENSIONS (W X H X D)			
Audio:	x1 (Earphone out)	Physical (inch / mm):	1724.96 x 1073.96 x 121.37 mm / 67.912 x 42.282 x 4.778 in		
SPDIF:	x1	Packaging (inch / mm):	1850 x 1160 x 225 mm / 72.8 x 45.7 x 8.9 in		
LAN		WEIGHT			
RJ45:	x2	Net (lb / kg):	152.1lb/69kg		
		Gross (lb / kg):	174.2lb/79kg		

Copyright © ViewSonic Corporation 2000-2024. All rights reserved.