

DABLIUTOUCH

Mod. RB | PREMIUM

4K ULTRAHD



SCAN ME

android 13
Upgradeable to Android 15

8 GB | 128 GB | 65" | 75" | 86" | 100" | Google EDLA

Display

Backlighting	DLED
Aspect Ratio	16:9
Viewing Angle	178° (H/V)
Resolution	4K UHD (3840 × 2160 @ 60 Hz)
Back Light Unit	DLED
Response Time	< 3 milliseconds or less
Refresh Rate	60Hz
Display Color	1.07Billion
Life time	>50.000 hrs
Tempered glass	4mm Mohs 7 tempered anti-glare
Bonding Type	Zero bonding

Interactivity

Frame rate	>300 hz
Touch Points	Up to 50 simultaneous touches
IR Touch Model	IST E series
Writing Height	1.5 mm
Touch Accuracy	± 0.5mm
Touch technology	Infrared multi-scan technology
Writing mode	Fingers, pen, or non-transparent tool
Pen Type	Battery-less
Pen Holder	yes
Compatibility*	Windows7® and above/Linux®/ Mac®/Android™/Chrome OS™

Interface (Rear)

HDMI In 2.0	3
HDMI OUT	1
DP	1
RS232	1
USB 3.0	2
USB 2.0	1
Type-C	1
Type-C OUT	1
RJ45 IN	1*10/100/1000Mbps
RJ45 OUT	1*10/100/1000Mbps
SPDIF OUT	1
MINI AV-in	2
LINE OUT	1
MIC IN	1
Android USB 3.0	1
Touch USB type-B	1
Micro-sd card	1
OPS Slot	1*80Pins (Max.80W)

Environmental

Operating Temperature	0°C- 40°C
Storage Temperature	-20°C-60°C
Operating Humidity	10%-90%RH
Storage Humidity	10%-90%RH

Included accessories

Power cable x1, Writing pen x2 WiFi Antennax4, HDMI x1, USB A-B 3.0 x1, NFC Cardx 2, remote controlx1, wall mount

Computing

Operating System	Android™13
RAM	8GB DDR4
ROM	128GB Byte
CPU	A76*4+A55*4
GPU	ARM Mali-G610 MP4
WiFi	WiFi 6 2.4G + 5G Dual WiFi
Bluetooth	Bluetooth 5.2
OSD	German, English, Spanish, French, Italian, Hungarian, Croatian, New Zealand language, Arabic, Russian.10 languages

Interface (Front)

HDMI In 2.0	1
Touch USB type-B	1
USB-C/Type-C	1
USB 3.0	3

Audio

Channel	2,1
Speaker	Tweeter:2*15W , Woofer: 1*20W
Sound output dir.	Slot front out + bass back out

Sensor


NFC	1
PM 2.5	1

Optional module OPS

(120 × 180 × 30 mm)


	65"	75"	86"	100"
Display Area	1440×816 mm	1650×928 mm	1895×1065 mm	2203×1239 mm
Contrast Ratio	6000:1	6000:1	6000:1	5000:1
Brightness(typ)	450 cd/m2	450 cd/m2	450 cd/m2	450 cd/m2
Dimensions	1490 × 902 × 87 mm	1712.6 × 1026 × 87 mm	1958 × 1166 × 116 mm	2258 × 1337 × 159 mm
Pack Dimensions	1605 × 200 × 1020 mm	1830 × 200 × 1160 mm	2075 × 220 × 1290 mm	2375 × 263 × 1414 mm
Wall-hanging Screw	M8×20mm	M8×20mm	M8×20mm	M8×20mm
Net Weight	38 ± 0.5KG	52 ± 0.5KG	63 ± 0.5KG	96 ± 0.5KG
Gross Weight	43±0.5KG	59 ± 0.5KG	79 ± 0.5KG	112 ± 0.5KG
VESA	500 × 400mm	600 × 400mm	800 × 400mm	800 × 400mm
Requirements	100-240V 50/60Hz 4.5A	100-240V 50/60Hz 4.5A	100-240V 50/60Hz 4.5A	100-240V 50/60Hz 7.5-1.8 A
Consumption (Max)	350 W	450 W	500 W	750 W
Consumption (Standby)	≤0.5W	≤0.5W	≤0.5W	≤0.5W

Technical drawings

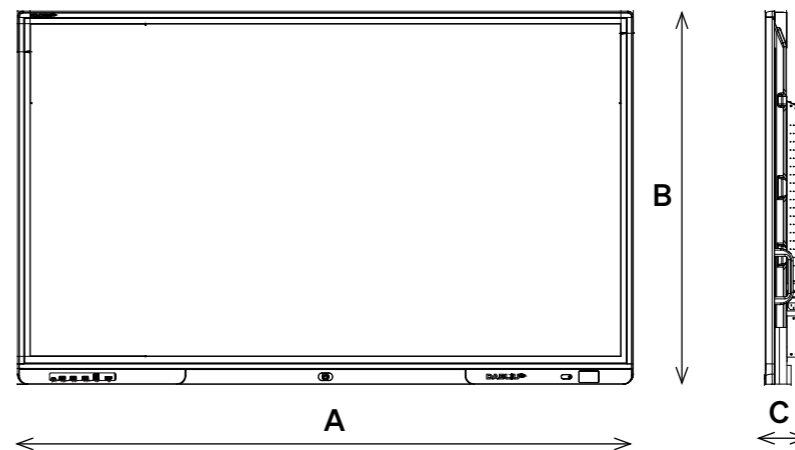

65" mm | 75" mm

A	1490	1712,6
B	902	1026
C	87	87,2
D	495,21	556,3
E	500	600
F	495,21	556,3
G	288,8	373,9
H	400	400
I	213,96	252,2

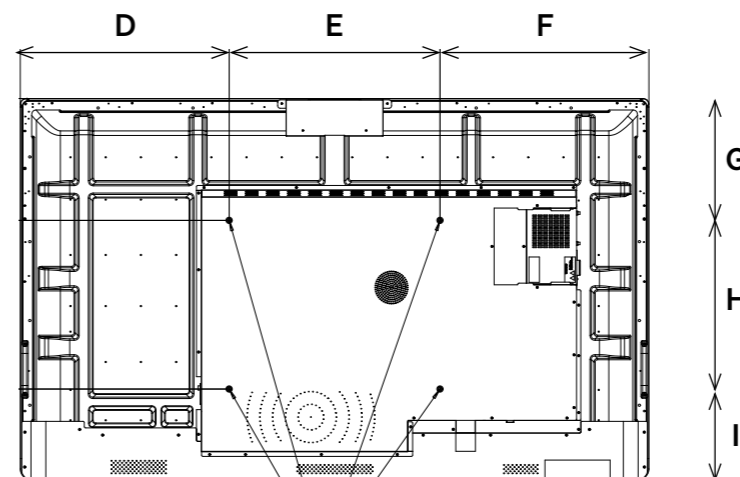

86" mm | 100" mm

A	1958,78	2258,7
B	1166,28	1337,5
C	116,3	159,6
D	579,39	729,4
E	800	800
F	579,39	729,4
G	526,71	649,7
H	400	400
I	239,57	287,8

© 2025 Wacebo. All rights reserved.

The content of this document, including images, texts, specifications, and layouts, is the property of Wacebo and is protected by applicable intellectual property laws. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means without the prior written permission of Wacebo. Product specifications and features are subject to change without notice.